



ALL90600-92000T

Line-Interactive-USV
600 - 2000 VA



Line-Interactive-USV
600 - 2000 VA

Die ALLNET USV schützt Ihr Büroequipment, wie PCs und deren Peripherie gegen Stromausfälle. Sie ist in den Größen 600, 1000, 1500 und 2000 VA erhältlich. Mit den kompakten Maßen dieser USV findet sie auch im kleinsten Büro in Ihrer Firma oder zu Hause noch Platz.


Die Verfügbarkeit der angeschlossenen Verbraucher wird erheblich verbessert und die Bedienung könnte einfacher nicht sein. Alle relevanten Informationen werden über ein hintergrundbeleuchtetes LCD Display mit Touchscreen angezeigt.

Besonderheiten

- Off-mode charging (Akkus werden auch bei ausgeschalteter USV geladen)
- Bedienung über Touchscreen
- 600-1000 VA geräuschlos, da ohne Lüfter
- Automatischer Wiederanlauf bei Stromrückkehr

Eigenschaften

- USV-Klassifizierung VI-SY-333 nach IEC 62040-3
- Line-Interactive-Technologie
- Kompakter Aufbau
- Ausgang modifizierter Sinus
- Kaltstartfunktion (Start im Batteriebetrieb)
- Mikroprozessorsteuerung
- Automatische Frequenzerkennung
- Automatische Spannungsregelung AVR mit Boost & Buck-Funktion verlängert die Lebensdauer von Batterien durch Spannungskorrekturen ohne Entladen der Batterie
- Serienmäßige USB Schnittstelle
- Managementsoftware für alle gängigen Betriebssysteme
- 24 Monate Gewährleistung

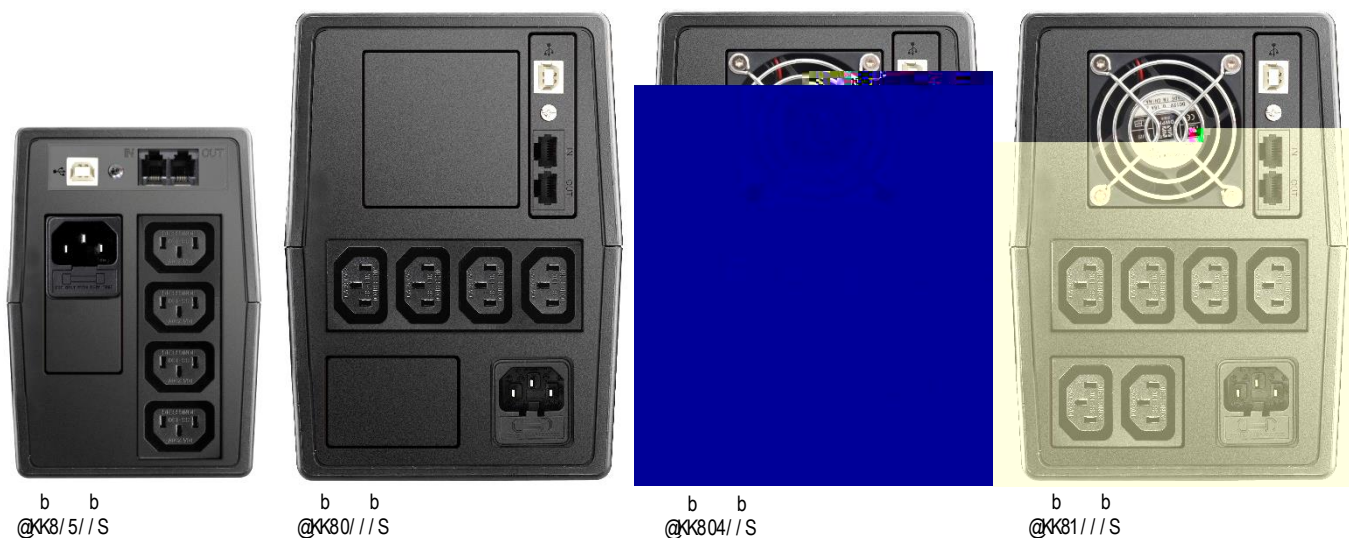

Model			ALL90600T	ALL91000T	ALL91500T	ALL92000T
Leistung	K	U@	5//	0//	04//	1//
	K	V	25/	5//	8//	01//
Überbrückungszeit	B K		01	14	24	2/
	14 K		11	15	13	07
	4/ K		7	6	8	5
	64 K		0	2	3	2
	0// K		/ 4	0	04	0
Eingang	A	a b	0 01 U 6@	1 01 U 6@	1 01 U 8@	1 01 U 8@
	M				12/ U@	
	D	a b			051 18/ U@	
	D	a b			4/ 5/ G @ ,R	
Ausgang	@				11/ 12/ 13/ U@	
	R	K L c			M	
	A	L c			0/	
	E	K L c			M	
	A	L c			0 G	
	E				/ 5	
DC Start	R				L c R	
J					I	
Umschaltzeit	b				1,5 -	
Batterie	S			U b V	A ,U ,@	
	K a		B -4I	a T a	a c(0/ I	
	K c	8/ b D c	B -3		B -3,5	
Display	KBC	S b b	D	@	A a c K A	
Akustischer Alarm	A	a a		S	0/ R c	
	A	K		S	c R c	
	a			S	/ 4 R c	
	TRU,R			T	a b S	
Schnittstellen				R	TRA@ b S A	
Umgebungsbed.	S			/ B 3/ B 1/ B		
	K b			/ ,8/ b c c		
	A a b . K		b .		34 cA@ 0 . 0 K	
Mechanisch	F			S . J		
	Rb			H 1/		
	L	G A S (	031 0/ 4 2//		071 02/ 21/	
	F b		33	71	0/ 3	0/ 5
Anschlüsse	D			0 HDB 0/ @		
	@			3 HDB		5 HDB
	R	@ b		a b L c c S		
Schutz/Normen	R c c			DM51/ 3/ ,0		
	DL U			DM51/ 3/ ,1 J B1		
	M			BD		

UPS Software – UPS software suite V6 - CD-ROM**Release „6.80“
Production 12/ 2017**

UPSMAN WINDOWS Solution:	WINDOWS 10.x (Pro, Enterprise) x86/x64 CPU WINDOWS 8.x (Pro, Enterprise) x86/x64 CPU WINDOWS 7 (Home Premium or higher) x86/x64 CPU WINDOWS Server 2016 (Standard,Datacenter) x64 CPU WINDOWS Server 2012 R2 (Standard,Datacenter) x64 CPU WINDOWS Server 2008 CORE x64 CPU WINDOWS Server 2008 R 2 (Standard, Enterprise, Datacenter, Webserver) x64 CPU WINDOWS VISTA (Business or higher) x86/x64 CPU WINDOWS 2003 Server X86/X64 CPU
UPSMAN UNIX Solution:	all kinds of LINUX flavours - all X86/x64 CPU based LINUX versions, eg. United 1.x /SCO Linux Server 4, LINUX SUSE 7-11.x & SLES, Fedora Linux, GENTOO Linux, RedHat 7.0-9.0, RH 4, RH5.4x x32/x64, TurboLinux 6.1-6.5, 7.x, Debian 4.x-9.x, Caldera Open Linux 2.3, Open Linux 3.1.x, Ubuntu, CentOS X86/x64 and all other x86/x64 kernel 2 based LINUX, NOVELL OES-Linux
APPLE MAC X Solution:	MAC OS X (Intel) 10.6.x, 10.7.x, 10.8.x Mountain Lion, 10.9.x Mavericks, 10.10.x Yosemite, 10.11.x El Capitan, 10.12.x Sierra
UNMS II Solution :	WINDOWS 10.x (Pro, Enterprise) x86/x64 CPU WINDOWS 8.x (Pro, Enterprise) x86/x64 CPU WINDOWS 7 (Professional or higher) x86/x64 CPU WINDOWS Server 2012 R2 (Standard,Datacenter) x64 CPU WINDOWS Server 2012 (Standard,Datacenter) x64 CPU WINDOWS Server 2008 R 2 (Standard, Enterprise, Datacenter, Webserver) x64 CPU WINDOWS Server 2008 (Standard, Enterprise, Datacenter, Webserver) x64 CPU WINDOWS Server 2003 SP2 WINDOWS VISTA (Business or higher) x86/x64 CPU
Multiple network shutdown RCCMD Solution:	An RCCMD installation keycode opens access to RCCMD clients for all OS mentioned above. <u>Additional</u> to the above listed OS, the following listed RCCMD versions are available from CD-ROM or download from the GENEREX website : VMware Sphere ESXi (only commercial ESXi, VMware certified) 4.x, 5.x, 6.x VMware ESX Server 3.5x / 4 (VMware certified) CITRIX XEN Server 4.5, 5.5, 6.0 and higher (Citrix certified) WINDOWS 2016 SERVER x64 WINDOWS 2012 X64 HYPER-V MICROSOFT CORE 2008 MICROSOFT HYPER-V 2008 (also CORE version) WINDOWS XP (Professional or higher) x86/x64 CPU WINDOWS 2008 X64 HYPER-V WINDOWS 2000 SP4 x86 CPU WINDOWS 2003 Server ITANIUM 64 CPU WINDOWS NT 4 SVP 6 WINDOWS 98SE & ME X86 CPU SUN SOLARIS 8, 9, 10, 11 X86, X64 X32 & X64 & SPARC CPU IBM AIX V. 3.25, 4.1, 4.3, 5.1, 5.2, 5.3 RS 6000 RISC and PowerPC CPU IBM AIX V. 6 on PowerPC4, 970, Power5, Power 6 CPU IBM AIX L (Linux) V. 6 on Power 6 CPU IBM AIX V. 5.3 RS 6000 RISC and PowerPC CPU HP UNIX V 10.20, 11.0-11i HP PA-RISC & Itanium CPU CENTOS INTEL x86, x64 & IA64 CPU MAC OS X 10.4x-10.10x SIEMENS SINIX 5.41 MX 300 Z X86 CPU SCO OpenServer 5.x u. 6.x 4 X86 CPU SUN SOLARIS 7 (5.7) SPARC CPU SUN OS 4 SPARC CPU UNIXWARE 2, 7 on X86 CPU, UNIXWARE 7.x SVR 4 compatible X86 CPU SIEMENS SINIX 5.41 – 5.45, RELIANT UNIX 5.45x RM RISC FREE BSD UNIX SVR 4 X86 V 4.4x and 6.x

No longer supported UPSMAN versions (please choose RCCMD instead) : DEC

ULTRIX, HP UNIX 9 PA-RISC CPU, IBM OS/2 Version WARP 4.0 X86 CPU, IBM OS/2 Version LAN SERVER 3.0, 4.0, 5.0 INTEL CPU, IBM OS/2 SNMP sub-agent, IBM AIX V 3.25, IBM AIX 4.1, WINDOWS NT 3.51 INTEL CPU, WINDOWS NT 3.51 ALPHA CPU, NOVELL NetWare 3.11 and 3.12 INTEL CPU, INTERACTIVE UNIX 3.2, VMS 5.5 for VAX or ALPHA, SUN SOLARIS 2.5, LINUX SUSE 5.x and 6.x. WINDOWS NT 4.0 ALPHA CPU, DEC OPEN VMS on VAX CPU, V.5x, V.6x, V. 7x - UPSMAN V3, DEC OPEN VMS on ALPHA AXP CPU V.6x; APPLE MAC OS 9.4, DEC OPEN VMS on ALPHA CPU V 7.x, SIEMENS SINIX 5.41 – 5.45, RELIANT UNIX 5.45x RM RISC HP/COMPAQ TRUE 64 V 5.x ALPHA CPU, Digital UNIX V 4.0-5.1 ALPHA CPU, WINDOWS NT 3.51 and NT 4 SVP3-6a X86 CPU, WINDOWS NT 3.51 ALPHA CPU, WINDOWS NT 3.15 MIPS CPU. APPLE MAC OS 9.x or higher, NOVELL NetWare 3.10, 3.11, 3.20 ,4.10-4.20, 5.0, 5.1, 6.0, 6.1, 6.5, IBM OS/2 Version WARP 3.0, 4.0, LAN SERVER 3.0, 4.0, 5.0 X86 CPU, DATA GENERAL UNIX X 86 CPU, DATA GENERAL UNIX MOTOROLA M88 CPU, MOTOROLA UNIX M88 CPU, SILICON GRAPHICS IRIX V. 6.5x RISC MIPS CPU, DEC UNIX SVR 3 OSF/1 ALPHA CPU, HP/COMPAQ TRU64 V 5.x ALPHA CPU, Digital UNIX V 4.0-5.1 ALPHA CPU, INTERACTIVE UNIX 3.2 X86 CPU, LINUX PowerPC CPU, LINUX ITANIUM X64 CPU, LINUX SUSE 6.3x APX ALPHA CPU, HP UNIX 9 PA-RISC CPU, HP UNIX V 11.2x, 11.3x SPARC & ITANIUM 64 CPU, QNX 4 and QNX 6 on X86, RCCMD for OPEN VMS on ALPHA AXP CPU V.7x (last compiled on V 7.3.2) and, V.8.0, RCCMD for VMS VAX 5.5, RCCMD for IBM OS 400 Release V4R5, V5, V6 and V7 („i5/OS“ V4R5M0- V7R1 with and without LPar)